



ABK

Dual-wall heat shrink tubing / automotive / adhesive lined / 4:1

Features:

- Crosslinked adhesive lined Polyolefin • Shrink ratio: 4:1
- High performance adhesive • Designed for wire harnesses / splices
- Tubing for automotive industry • Excellent mechanical performance

Approvals:



- Meets: UL224 125 600V SAE-AMS-DTL-23053/4

Application:

- Operating temperature: -55 °C to +125 °C • Minimum shrink temperature: +110 °C
- Minimum full recovery temperature: +135 °C • Longitudinal change: 0 ± 10% max.

Order information:

- Colors: black, transparent

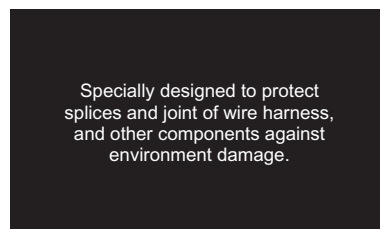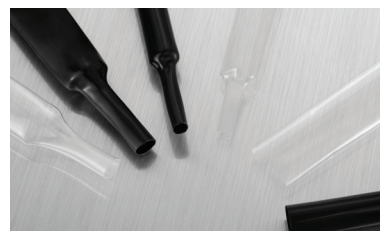

Type / Size	As supplied: inside diameter in mm (min.)	After recovery: inside diameter in mm (max.)	After recovery: wall thickness in mm (min.)	Standard length in mm
ABK 6,0/1,27	6,0	1,27	1,30	1220
ABK 8,0/1,65	8,0	1,65	1,52	1220
ABK 12,0/2,41	12,0	2,41	1,91	1220
ABK 18,0/4,45	18,0	4,45	2,41	1220

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. BOXCO shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.