



ACS-55-HF

Thin-wall heat shrink tubing / flexible / halogen free /
flame retardant / 2:1

Features:

- Crosslinked Polyolefin • Shrink ratio: 2:1 • Flame retardant
- General purpose • High flexibility • Halogen free

Approvals:


- UL 224 125°C VW-1 600V file E527507 • CSA C22.2 No. 198.1-06 (except clear)
- Meets: RoHS, Sony-SS-00259 Meets: SAE-AMS-DTL-23053/5 class 1 and 2

Application:

- Operating temperature: -55 °C to +135 °C
- Minimum shrink temperature: +70 °C
- Minimum full recovery temperature: +100 °C
- Longitudinal change: 0 ± 10% max.

Order information:

- Colors: Black
- Other colors are available on request

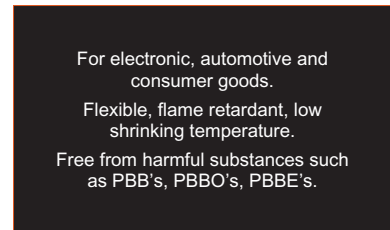

Type / Size	As supplied: inside diameter in mm (min.)	After recovery: inside diameter in mm (max.)	After recovery: wall thickness in mm (+/- 0,05)	Reel / Meter
ACS-55-HF-1,2	1,2	0,6	0,33	150
ACS-55-HF-1,6	1,6	0,8	0,36	150
ACS-55-HF-2,4	2,4	1,2	0,44	150
ACS-55-HF-3,2	3,2	1,6	0,44	150
ACS-55-HF-4,8	4,8	2,4	0,51	75
ACS-55-HF-6,4	6,4	3,2	0,56	75
ACS-55-HF-9,5	9,5	4,8	0,56	75
ACS-55-HF-12,7	12,7	6,4	0,65	50
ACS-55-HF-16,0	16,0	8,0	0,69	50
ACS-55-HF-19,0	19,0	9,5	0,80	30
ACS-55-HF-25,4	25,4	12,7	0,90	30
ACS-55-HF-32,0	32,0	16,0	0,90	30
ACS-55-HF-38,1	38,1	19,0	1,00	30
ACS-55-HF-50,8	50,8	25,4	1,00	30
ACS-55-HF-76,2	76,2	38,1	1,20	15
ACS-55-HF-102,0	102,0	50,8	1,30	15
ACS-55-HF-126,0	126,0	63,5	1,30	15
ACS-55-HF-150,0	150,0	76,0	1,30	15

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. BOXCO shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.