




Earthing straps

- ▶ Sections from 6 to 25 mm²
- ▶ Custom solutions available
- ▶ Sections up to 95 mm² on request
- ▶ High conductivity

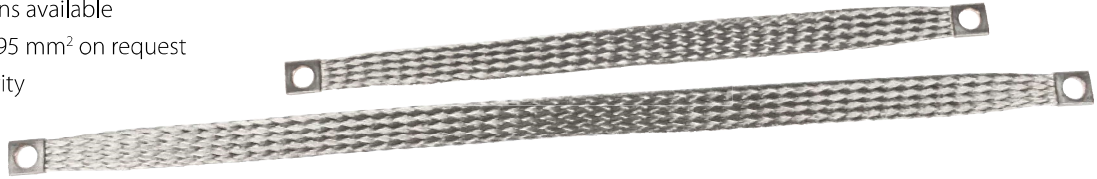



Model	Code	Section [mm ²]	Dimensions [mm]		
			L	D	W
CTX-6/100/6	1734080000	6	100	6	10
CTX-6/150/6	1734080005		150	6	
CTX-6/200/6	1734080010		200	6	
CTX-6/250/6	1734080015		250	6	
CTX-6/300/6	1734080020		300	6	
CTX-6/400/6	1734080025		400	6	
CTX-6/500/6	1734080030		500	6	
CTX-10/100/6	1734080035	10	100	6	15
CTX-10/100/8	1734080040		100	8	
CTX-10/150/8	1734080045		150	8	
CTX-10/200/6	1734080050		200	6	
CTX-10/200/8	1734080055		200	8	
CTX-10/250/6	1734080060		250	6	
CTX-10/300/6	1734080065		300	6	
CTX-10/300/8	1734080070		300	8	
CTX-10/400/6	1734080075		400	6	
CTX-10/400/8	1734080080		400	8	
CTX-10/500/6	1734080085		500	6	
CTX-16/100/6	1734080090		16	100	
CTX-16/100/8	1734080095	100		8	
CTX-16/150/6	1734080100	150		6	
CTX-16/150/8	1734080105	150		8	
CTX-16/200/6	1734080110	200		6	
CTX-16/200/8	1734080115	200		8	
CTX-16/250/8	1734080120	250		8	
CTX-16/300/6	1734080125	300		6	
CTX-16/300/8	1734080130	300		8	
CTX-16/350/8	1734080135	350		8	
CTX-16/400/8	1734080140	400		8	
CTX-16/500/8	1734080145	500		8	
CTX-16/600/8	1734080150	600		8	
CTX-25/100/10	1734080155	25		100	10
CTX-25/150/10	1734080160		150	10	
CTX-25/200/8	1734080165		200	8	
CTX-25/200/10	1734080170		200	10	
CTX-25/250/8	1734080175		250	8	
CTX-25/300/8	1734080180		300	8	
CTX-25/300/10	1734080185		300	10	
CTX-25/350/10	1734080190		350	10	
CTX-25/400/8	1734080195		400	8	
CTX-25/500/8	1734080200		500	8	
CTX-25/600/8	1734080205		600	8	

The CTX flexible earthing straps are made of tinned copper braided wires.

Pure Cu-ETP - ASTM C11000 copper enables an excellent ground connection.

Technical data

Material: tinned copper >99,95%



Dimensions [mm]

